

VXC

Refrigerant condensers



Key benefits

- Reliable
- Quiet
- Compact

VXC characteristics

- Counter flow, centrifugal fan, forced draft
- PED 97/23/EC coil design

Capacity range

VXC : 60 - 6920 kW
(for single cell models, nominal R22 kW's)

Typical applications

- Tight enclosures and installations requiring a single air inlet
- Limited plan area installations
- Indoor installations
- Sound critical installations
- Dry operation in winter time



Reliable operation guaranteed

- Since 1978, thousands globally installed, proving the VXC condenser **reliability**.
- Fans, motor and drive system (V-belt) are located in the **dry air**, preventing moisture and condensation. No external moving parts, helping it withstand the toughest weather.
- Various corrosion-resistant materials, including the [Baltiplus 810™ coating](#) for guaranteed long service life.

Ideal for a quiet operation

- VXC evaporative condensers include **quiet internal centrifugal fans** for minimal surrounding noise.
- Single-side air inlet, and a **quieter condenser rear** for more noise-sensitive areas.
- Cut operation noise still further with factory-designed and tested **sound attenuators** or silencers.

More compact

- Compact design for **confined spaces**,
- Single-side air inlet lets you install **next to solid walls**,
- Units housable **indoors** thanks to centrifugal fans allowing intake or discharge ductwork.

Reduced shipping, rigging and installation costs

- VXC units are **factory-assembled**. We ship larger models in 2 sections to reduce the size and weight of the heaviest section for **easy on-site assembly** with smaller cranes
- Single fan side requiring **fewer motor starters** to install and wire.
- VXC offers high capacity and minimal operating weight. **Save on steel supports**, both underneath the equipment and in the building itself for rooftop installations.
- VXC-C models can be **container-shipped** (in 10' containers). Fan enclosures shippable loose in the condenser bottom section for easy on-site assembly.

Interested in the VXC condenser for your industrial refrigeration application? Contact your local [BAC representative](#) for more information.

Downloads


- [VXC refrigerant condenser](#)
- [Operating and Maintenance VXC](#)
- [Rigging and installation VXC](#)

VXC

Refrigerant condensers

Principle of operation

Vapor (1) enters through a **evaporative condensing coil (2)** and gets water sprayed on by the **spray system (3)** at the top of the condenser. At the same time the **centrifugal fan (4)**, located at the bottom of the unit, blows ambient **air (5)** upwards through the condenser. During operation, heat is transferred from the internal circuit coil to the water, and then to the atmosphere as a portion of the water that evaporates. The condensed vapor then **exits the unit (6)**. The **sump (7)** or basin collects the water. The spray water **pump (8)** recirculates the water up to the water spray system. The warm saturated **air (9)** leaves the condenser through the drift **eliminators (10)**, which remove water droplets from the air.



Interested in the VXC condenser? Contact your local [BAC representative](#) for more information.


VXC

Refrigerant condensers

Construction details

1. Material options

- Heavy-gauge hot-dip galvanized steel is used for external unit steel panels and structural elements featuring [Baltiplus 800™ Corrosion Protection](#).
- The [Baltiplus 810™ coating](#) is an **optional extra**. A hybrid polymer coating for longer service life, applied pre-assembly to all hot-dip galvanized steel components of the unit.
- Optional [stainless steel](#) panels and structural elements of type 304 or 316 for extreme applications.
- Or the economical alternative: a **water-contact stainless steel cold water basin**. Its key components and the basin itself are stainless steel.



2. Heat transfer media

- Our heat transfer media is a **condensing coil**. In comprehensive [lab thermal performance tests](#), it showed proved thermal cooler performance and offers you unrivalled system efficiency.
- The coil is constructed of continuous length of prime surface steel, hot-dip galvanized after fabrication. Designed for maximum 18 bar operating pressure according to PER. Pneumatically tested at 26.5 bar.



Try our VXC coil options:

- **Multiple circuit coils (split coils)** for your halo carbon refrigerants, maintaining individual compressor systems. Or use it for compressor jacket water or glycol cooling.
- **Stainless steel coils** are in type 304L or 316L.
- **High pressure coils** are designed for 28 bar operating pressure and pneumatically tested for 40 bar. Hot-dip galvanized after fabrication.

All coils are designed for low pressure drop with sloping tubes for free drainage of fluid.

3. Air movement system

- With motor-driven centrifugal fan and a **V-belt drive**. You can easily remove the entire motor base for proper belt tensioning to ensure constantly correct belt alignment. Together with the **heavy duty fan shaft bearings** this guarantees optimal operational efficiency. Single- and multi speed available.
- **Centrifugal fan(s)** are forward-curved and nearly noiseless. Overcome external static pressure! Use [sound attenuators](#) and duct work etc. for air intake/discharge with no loss of thermal performance!
- **Our drift eliminators** come in UV-resistant plastic, which will not rot, decay or decompose and their performance is tested and **certified by Eurovent**. They are assembled in **easily handled and removable sections**, for optimal internal access.
- Steel eliminators, protected with the [Baltiplus 810™ coating](#), for optimal corrosion protection, are also available for specific applications.



4. Water distribution system

These consist of:

- A **header** and **spray branches** with wide non-clog plastic **nozzles**, secured by rubber **grommets**. You can easily remove, clean and flush both nozzles and spray branches.
- A cold water basin with:
 - **strainers** which are easy to lift out and the anti-vortexing device also helps stop trapped air
 - mechanical **make up**
 - circular **access door**
- Close coupled, bronze fitted centrifugal **spray pump** with totally enclosed fan cooled (TEFC) motor. Bleed line with metering valve installed from pump discharge to overflow.



Like to know more about the VXC construction details? Contact your [local BAC representative](#).

VXC

Refrigerant condensers

Options and accessories


Below is a listing of the main VXC options and accessories. If your required option or accessory is not listed, look no further than your [local BAC representative](#).



Sound attenuation

Reducing noise at air intake and discharge points brings us closer to silent cooling equipment.

- For **light** sound reduction, ideal for **suburban** requirements, try the XA sound attenuation.
- The **medium** sound reductions attained through XB sound attenuation are perfect for **residential** sound requirements
- For **heavy** sound reductions, XC sound attenuation is the best option, ideal for **rural** sound requirements.

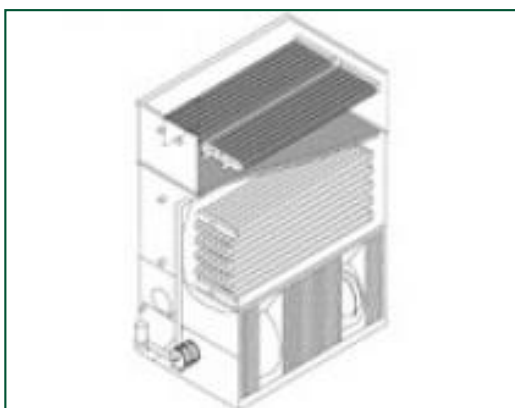

Desuperheater

Boost capacity and reduce plume of ammonia reciprocating compressor systems with a desuperheater.



Baltiguard drive system

With this, operate your system like a dual-speed motor, but with standby reserve capacity **to cope with any failure.**



Nitrogen filling of coil

Charge the condensing coil with nitrogen for **anti-corrosion protection** during long shipment periods (ocean freight) or on-site storage.



Remote sump connection

The best way to **prevent a sump freezing** is to use the auxiliary remote variety within a heated area. Shutting off the circulating pump allows all the water in the water distribution, as well as that in suspension and the sump to drain freely to the auxiliary sump.



Basin heater package

Thanks to our factory-installed heaters, the water stays at 4°C and **never freezes**, even during equipments downtime and however cold it gets outside.



Electric water level control package

For perfectly precise water level control, replace the standard mechanical valve with our electrical water level controller.



Platforms

To inspect and maintain from the top of the unit more **easily** and **safely**, platforms can be installed.



Ladder, safety cage and handrail

A ladder, safety cage and handrails **all facilitate access to the top of the unit** and safe inspection of your condenser.




Extended lubrication lines

Extended lubrication lines with easily accessible grease fittings can be used **to lubricate** fan shaft bearings.



Discharge hood

Discharge hoods **reduce the risk of re-circulation** in tight enclosures by increasing discharge air velocity, and can be used to elevate the unit discharge above adjacent walls to comply with layout guidelines.

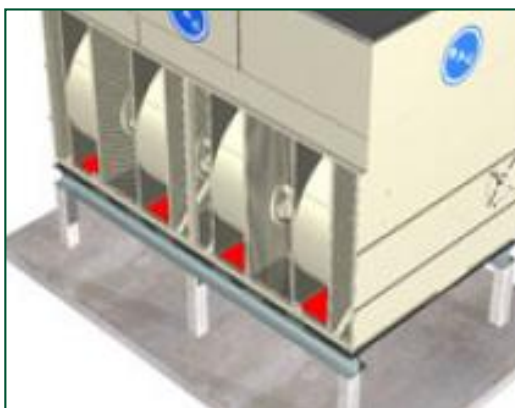

Solid bottom panels

You need factory-installed bottom panels when intake air is ducted to the unit.



Standby pump

Install a standby **reserve spray pump** as failure backup!



Filter

Separators and media filters efficiently **remove suspended solids** in the recirculating water, reducing system cleaning costs and optimizing water treatment results. Filtration helps you keep the recirculating water clean.



Sump sweeper piping

Sump sweeper piping **prevents sediment collecting in the cold water basin** of the unit. A complete piping system, including nozzles, is installed in the basin of the condenser **for connection to side stream filtration** equipment.



Water treatment equipment

Devices to control water treatment are needed to ensure proper **condenser water care**. Not only does this help protect the components and fill pack, controlling corrosion, scaling and fouling, it also avoids the proliferation of harmful bacteria, including **legionella**, in the recirculating water.



Clean out port

Clean out port **makes it easy to eliminate silt and sludge** from the condenser basin when cleaning and flushing the sump.



Steel drift eliminators

Steel drift eliminators are more **robust** than plastic alternatives.

VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC 14-135

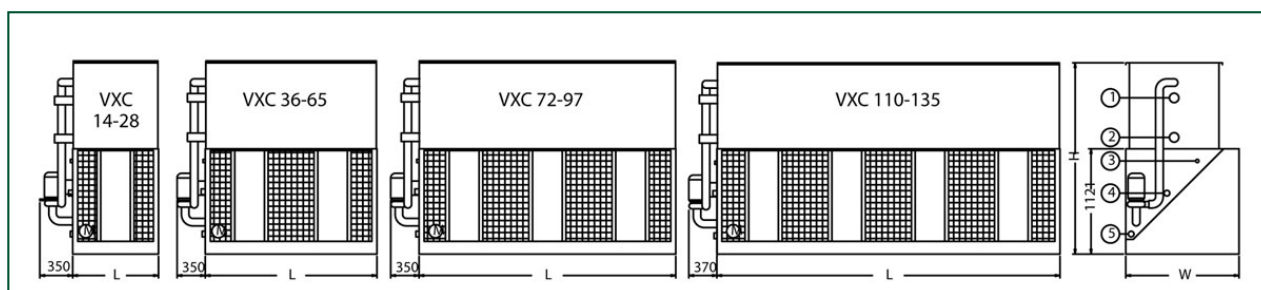

1. Refrigerant in ND100 (for VXi 14-28 ND80);
 2. Refrigerant out ND100 (for VXi 14-28 ND80);
 3. Make up;
 4. Overflow;
 5. Drain;
 6. Access (models 14 thru 135 have access door at the back);
- For VXC 14 thru 135: make up ND25; overflow ND50; drain ND50.

| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC 14 | 660 | 600 | 580 | 914 | 1207 | 2035 | 2.3 | (1x) 1.5 | 2.2 | (1x) 0.25 | 9.0 |
| VXC 18 | 740 | 670 | 660 | 914 | 1207 | 2245 | 2.2 | (1x) 1.5 | 2.2 | (1x) 0.25 | 11.0 |
| VXC 25 | 830 | 760 | 480 | 914 | 1207 | 2467 | 2.5 | (1x) 2.2 | 2.2 | (1x) 0.25 | 15.0 |
| VXC 28 | 900 | 830 | 540 | 914 | 1207 | 2683 | 2.4 | (1x) 2.2 | 2.2 | (1x) 0.25 | 19.0 |
| VXC 36 | 1050 | 920 | 920 | 1829 | 1207 | 2035 | 4.6 | (1x) 4.0 | 4.7 | (1x) 0.37 | 16.0 |
| VXC 45 | 1170 | 1030 | 1030 | 1829 | 1207 | 2245 | 5.0 | (1x) 4.0 | 4.7 | (1x) 0.37 | 20.0 |
| VXC 52 | 1310 | 1160 | 700 | 1829 | 1207 | 2467 | 4.8 | (1x) 4.0 | 4.7 | (1x) 0.37 | 29.0 |
| VXC 59 | 1330 | 1180 | 700 | 1829 | 1207 | 2467 | 5.3 | (1x) 5.5 | 4.7 | (1x) 0.37 | 29.0 |
| VXC 65 | 1500 | 1330 | 860 | 1829 | 1207 | 2683 | 5.5 | (1x) 5.5 | 4.7 | (1x) 0.37 | 36.0 |
| VXC 72 | 1810 | 1490 | 1000 | 2737 | 1207 | 2578 | 5.8 | (1x) 4.0 | 7.1 | (1x) 0.75 | 41.0 |
| VXC 86 | 1820 | 1500 | 1000 | 2737 | 1207 | 2578 | 7.5 | (1x) 7.5 | 7.1 | (1x) 0.75 | 41.0 |
| VXC 97 | 2080 | 1730 | 1200 | 2737 | 1207 | 2813 | 7.1 | (1x) 7.5 | 7.1 | (1x) 0.75 | 50.0 |
| VXC 110 | 2240 | 1800 | 1200 | 3658 | 1207 | 2578 | 10.4 | (1x) 7.5 | 9.5 | (1x) 0.75 | 59.0 |
| VXC 125 | 2510 | 2050 | 1440 | 3658 | 1207 | 2813 | 9.9 | (1x) 7.5 | 9.5 | (1x) 0.75 | 73.0 |
| VXC 135 | 2540 | 2080 | 1440 | 3658 | 1207 | 2813 | 10.9 | (1x) 11.0 | 9.5 | (1x) 0.75 | 73.0 |

VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by: 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-on-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC 150-205

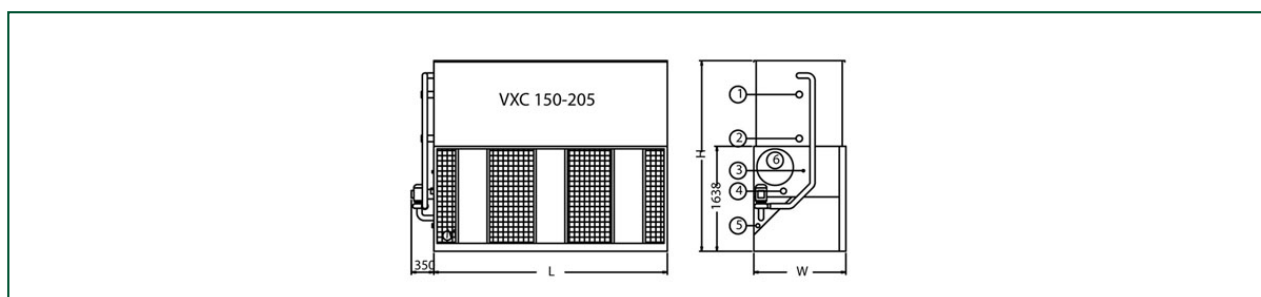

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up; 4. Overflow; 5. Drain; 6. Access; For VXC 150 thru 265; make up ND50; overflow ND80, drain ND50.



| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC 150 | 3210 | 2640 | 1720 | 3645 | 1438 | 3093 | 13.3 | (1x) 7.5 | 13.9 | (1x) 1.5 | 77.0 |
| VXC 166 | 3240 | 2670 | 1720 | 3645 | 1438 | 3093 | 15.8 | (1x) 11.0 | 13.9 | (1x) 1.5 | 77.0 |
| VXC 185 | 3670 | 2950 | 1980 | 3645 | 1438 | 3328 | 15.7 | (1x) 11.0 | 13.9 | (1x) 1.5 | 104.0 |
| VXC 205 | 3980 | 3255 | 2240 | 3645 | 1438 | 3563 | 16.9 | (1x) 15.0 | 13.9 | (1x) 1.5 | 111.0 |

VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by: 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your BAC Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC 221-265

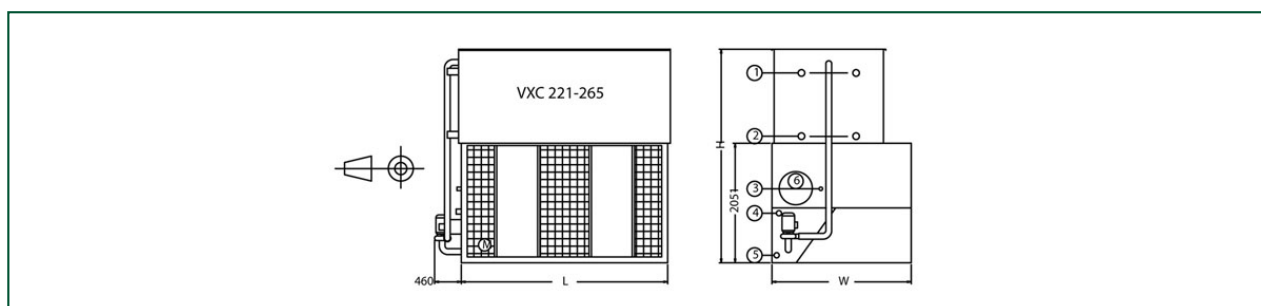

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up; 4. Overflow; 5. Drain; 6. Access; For VXC 150 thru 265: make up ND50; overflow ND80, drain ND50.



| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC 221 | 5860 | 4250 | 2630 | 3550 | 2397 | 3585 | 20.8 | (1x) 15.0 | 19.2 | (1x) 2.2 | 118.0 |
| VXC 250 | 6390 | 4770 | 3150 | 3550 | 2397 | 3820 | 21.2 | (1x) 15.0 | 19.2 | (1x) 2.2 | 146.0 |
| VXC 265 | 6435 | 4815 | 3150 | 3550 | 2397 | 3820 | 22.7 | (1x) 18.5 | 19.2 | (1x) 2.2 | 146.0 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC 357-399-454-562-620-680-714-798-908-1124-1240-1360

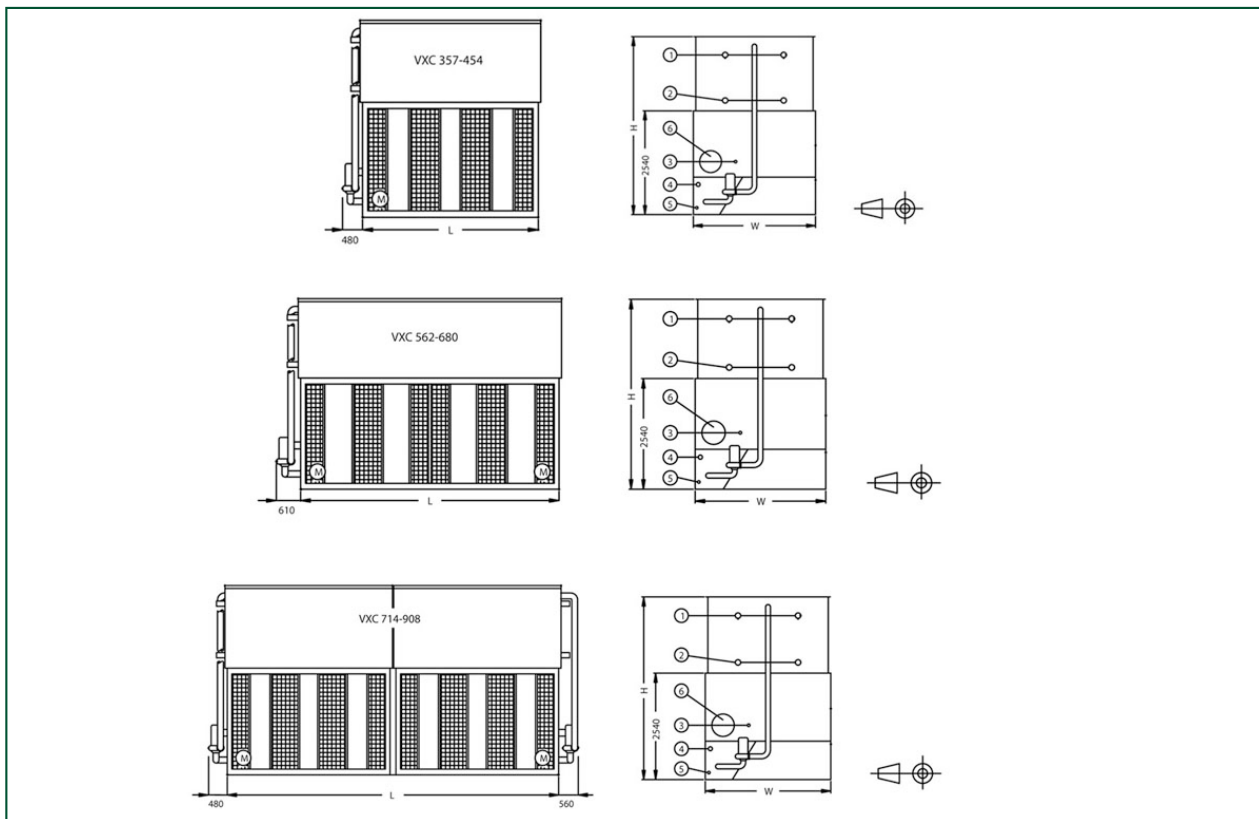

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up; 4. Overflow ND80; 5. Drain ND50; 6. Acces; For VXC 1124 thru 1360: make up ND80.

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up; 4. Overflow ND80; 5. Drain ND50; 6. Acces; For VXC 357 thru 908: make up ND50.

| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|-------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC 357 | 6940 | 5300 | 3940 | 3550 | 3000 | 4075 | 34.3 | (1x) 22.0 | 30.8 | (1x) 4.0 | 180.0 |
| VXC 399 | 8290 | 6600 | 4730 | 3550 | 3000 | 4310 | 31.6 | (1x) 22.0 | 30.8 | (1x) 4.0 | 218.0 |
| VXC 454 | 9580 | 7860 | 5510 | 3550 | 3000 | 4545 | 34.4 | (1x) 30.0 | 30.8 | (1x) 4.0 | 250.0 |
| VXC 562 | 11490 | 8990 | 5810 | 5388 | 3000 | 4075 | 51.2 | (2x) 18.5 | 46.7 | (1x) 4.0 | 250.0 |
| VXC 620 | 12680 | 10200 | 7010 | 5388 | 3000 | 4310 | 50.0 | (2x) 18.5 | 46.7 | (1x) 4.0 | 350.0 |
| VXC 680 | 14100 | 11530 | 8200 | 5388 | 3000 | 4545 | 52.0 | (2x) 22.0 | 46.7 | (1x) 4.0 | 390.0 |
| VXC 714 | 14430 | 10600 | 3940 | 7226 | 3000 | 4075 | 68.6 | (2x) 22.0 | 61.6 | (2x) 4.0 | 360.0 |
| VXC 798 | 16590 | 13200 | 4730 | 7226 | 3000 | 4310 | 63.2 | (2x) 22.0 | 61.6 | (2x) 4.0 | 436.0 |
| VXC 908 | 19140 | 15700 | 5510 | 7226 | 3000 | 4545 | 68.8 | (2x) 30.0 | 61.6 | (2x) 4.0 | 500.0 |
| VXC 1124 | 22740 | 17940 | 5810 | 10903 | 3000 | 4075 | 102.4 | (4x) 18.5 | 93.4 | (2x) 4.0 | 500.0 |
| VXC 1240 | 25240 | 20380 | 7010 | 10903 | 3000 | 4310 | 100.1 | (4x) 18.5 | 93.4 | (2x) 4.0 | 700.0 |
| VXC 1360 | 28090 | 23100 | 8200 | 10903 | 3000 | 4545 | 104.0 | (4x) 22.0 | 93.4 | (2x) 4.0 | 780.0 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end . Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC 495-516-715-772-804-990-1032-1430-1544-1608

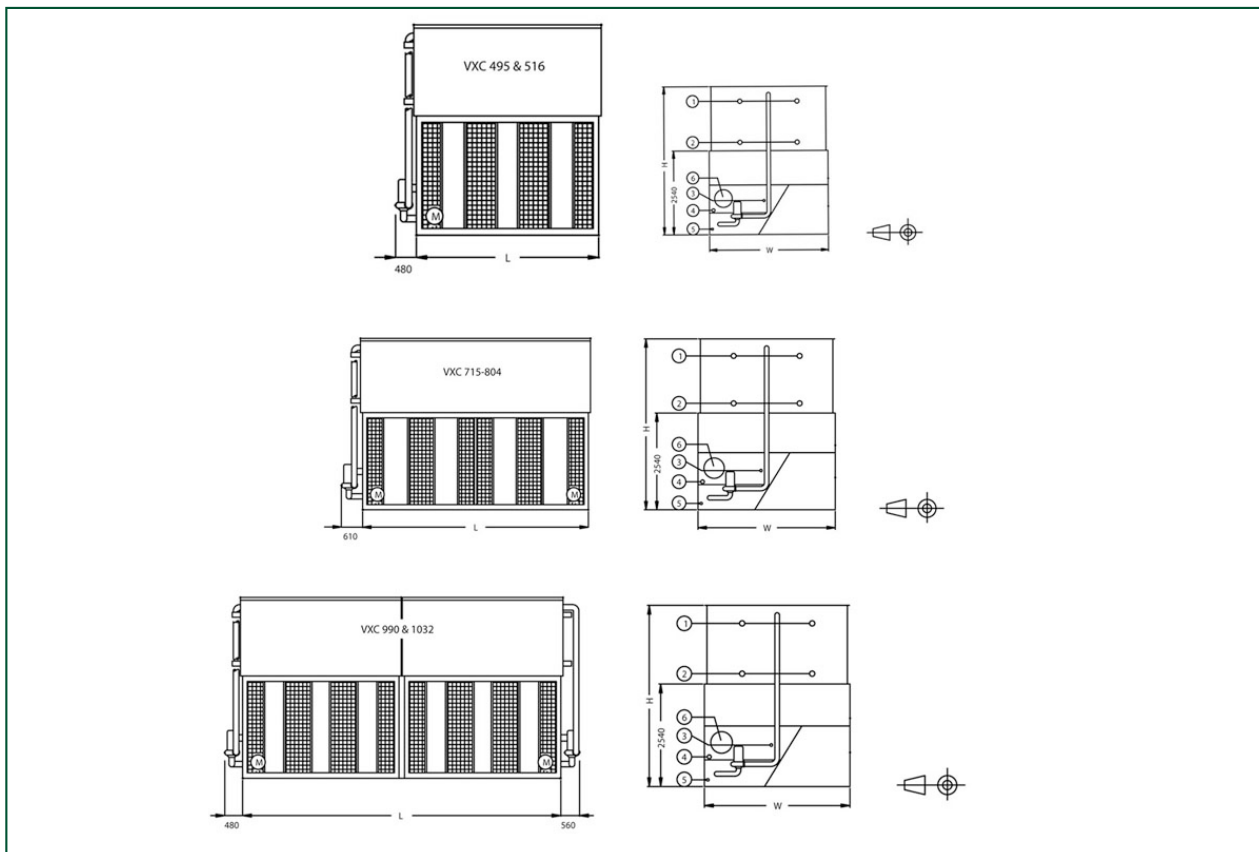

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up, 4. Overflow ND80; 5. Drain ND50; 6. Access. For VXC 1430 through 1608 : Make up ND80.

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up, 4. Overflow ND80; 5. Drain ND50; 6. Access. For VXC 495 through 1032: Make up ND50.



| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|-------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC 495 | 12040 | 8210 | 5610 | 3550 | 3607 | 4310 | 40.0 | (1x) 37.0 | 39.1 | (1x) 4.0 | 250.0 |
| VXC 516 | 13030 | 9170 | 6550 | 3550 | 3607 | 4545 | 39.4 | (1x) 37.0 | 39.1 | (1x) 4.0 | 298.0 |
| VXC 715 | 17555 | 11855 | 8310 | 5388 | 3607 | 4310 | 56.1 | (2x) 22.0 | 56.8 | (1x) 4.0 | 374.0 |
| VXC 772 | 17735 | 12035 | 8310 | 5388 | 3607 | 4310 | 62.3 | (2x) 30.0 | 56.8 | (1x) 4.0 | 374.0 |
| VXC 804 | 19290 | 13435 | 9710 | 5388 | 3607 | 4545 | 60.4 | (2x) 30.0 | 56.8 | (1x) 4.0 | 450.0 |
| VXC 990 | 24185 | 16520 | 5610 | 7226 | 3607 | 4310 | 80.0 | (2x) 37.0 | 78.2 | (2x) 4.0 | 500.0 |
| VXC 1032 | 26095 | 18280 | 6550 | 7226 | 3607 | 4545 | 78.8 | (2x) 37.0 | 78.2 | (2x) 4.0 | 596.0 |
| VXC 1430 | 35200 | 23680 | 8300 | 10903 | 3607 | 4310 | 112.2 | (4x) 22.0 | 113.6 | (2x) 4.0 | 748.0 |
| VXC 1544 | 35560 | 23770 | 8300 | 10903 | 3607 | 4310 | 124.6 | (4x) 30.0 | 113.6 | (2x) 4.0 | 748.0 |
| VXC 1608 | 38665 | 26845 | 9710 | 10903 | 3607 | 4545 | 120.8 | (4x) 30.0 | 113.6 | (2x) 4.0 | 900.0 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC C220-C426

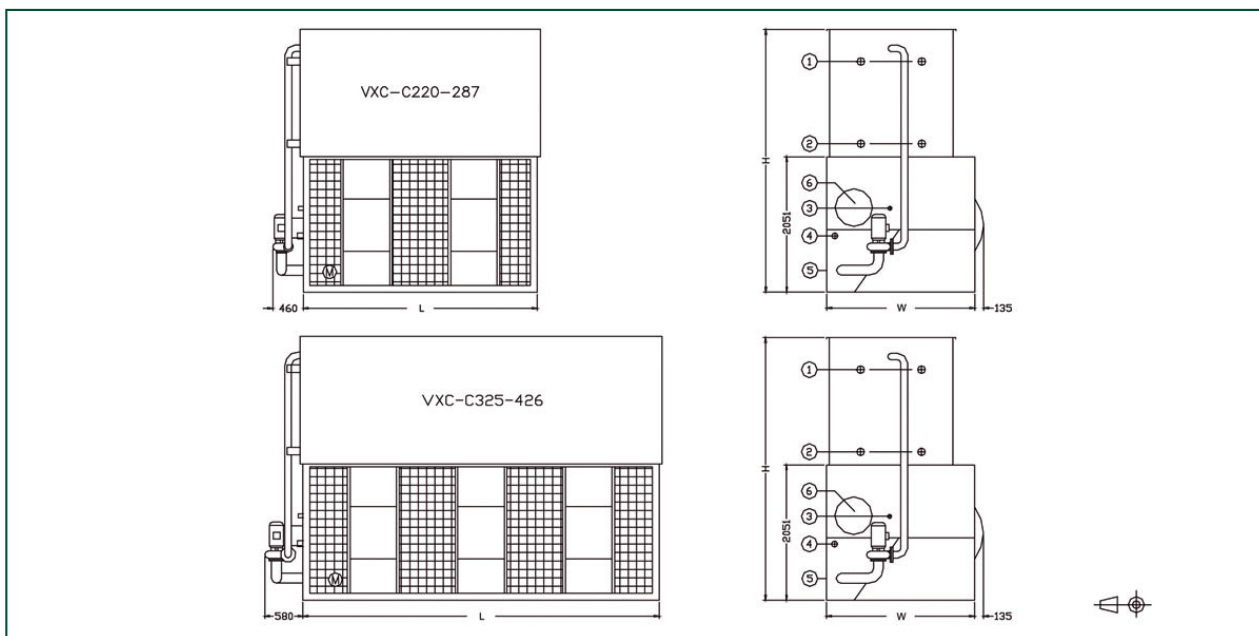

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND50; 4. Overflow ND80; 5. Drain ND50; 6. Access fan covers are shipped loose.

| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|-------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC C220 | 5940 | 4250 | 2630 | 3550 | 2245 | 3585 | 20.58 | (1x) 15.0 | 19.2 | (1x) 2.2 | 118.0 |
| VXC C250 | 6415 | 4770 | 3150 | 3550 | 2245 | 3820 | 20.12 | (1x) 15.0 | 19.2 | (1x) 2.2 | 146.0 |
| VXC C265 | 6440 | 4795 | 3150 | 3550 | 2245 | 3820 | 21.65 | (1x) 18.5 | 19.2 | (1x) 2.2 | 146.0 |
| VXC C287 | 7450 | 5315 | 3665 | 3550 | 2245 | 4055 | 22.49 | (1x) 22.0 | 19.2 | (1x) 2.2 | 154.0 |
| VXC C325 | 8730 | 6135 | 3885 | 5385 | 2245 | 3585 | 31.51 | (1x) 18.5 | 29.0 | (1x) 4.0 | 156.0 |
| VXC C340 | 8735 | 6145 | 3885 | 5385 | 2245 | 3585 | 33.48 | (1x) 22.0 | 29.0 | (1x) 4.0 | 156.0 |
| VXC C380 | 9430 | 6945 | 4685 | 5385 | 2245 | 3820 | 32.19 | (1x) 22.0 | 29.0 | (1x) 4.0 | 196.0 |
| VXC C408 | 9470 | 7030 | 4685 | 5385 | 2245 | 3820 | 35.49 | (1x) 30.0 | 29.0 | (1x) 4.0 | 196.0 |
| VXC C426 | 10260 | 7830 | 5485 | 5385 | 2245 | 4055 | 34.65 | (1x) 30.0 | 29.0 | (1x) 4.0 | 234.0 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end . Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1,93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

VXC S288-S1010

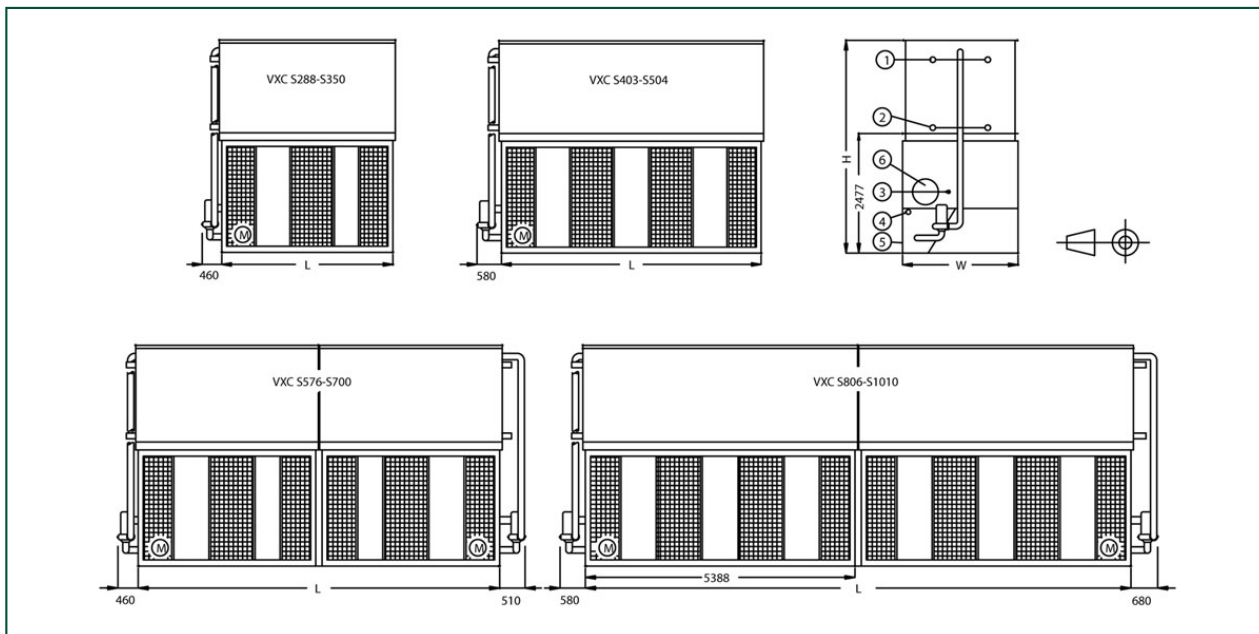

1. Refrigerant in ND100; 2. Refrigerant out ND100; Make up ND50; 4. Overflow ND80; 5. Drain ND50; 6. Access.

| Model | Weights (kg) | | | Dimensions (mm) | | | Air Flow (m³/s) | Fan Motor (kW) | Water Flow (l/s) | Pump Motor (kW) | R717 charge (kg) |
|--------------|-------------------------|-------------------------|-----------------------------|-----------------|------|------|--------------------|-------------------|---------------------|-----------------------|------------------------|
| | Oper. Weight (kg) | Ship. Weight(kg) | Heaviest Section (kg) | L | W | H | | | | | |
| VXC S288 | 7600 | 5525 | 3850 | 3550 | 2397 | 4248 | 22.8 | (1x) 18.5 | 25.2 | (1x) 2.2 | 164.0 |
| VXC S300 | 7630 | 5555 | 3850 | 3550 | 2397 | 4248 | 24.2 | (1x) 22.0 | 25.2 | (1x) 2.2 | 164.0 |
| VXC S328 | 7705 | 5630 | 3850 | 3550 | 2397 | 4248 | 26.7 | (1x) 30.0 | 25.2 | (1x) 2.2 | 164.0 |
| VXC S350 | 8320 | 6180 | 4470 | 3550 | 2397 | 4483 | 26.2 | (1x) 30.0 | 25.2 | (1x) 2.2 | 196.0 |
| VXC S403 | 10225 | 7170 | 4715 | 5385 | 2397 | 4013 | 36.6 | (1x) 30.0 | 38.5 | (1x) 4.0 | 198.0 |
| VXC S429 | 10285 | 7230 | 4715 | 5385 | 2397 | 4013 | 38.9 | (1x) 37.0 | 38.5 | (1x) 4.0 | 198.0 |
| VXC S455 | 11270 | 8125 | 5710 | 5385 | 2397 | 4248 | 34.9 | (1x) 30.0 | 38.5 | (1x) 4.0 | 246.0 |
| VXC S482 | 11320 | 8175 | 5710 | 5385 | 2397 | 4248 | 37.5 | (1x) 37.0 | 38.5 | (1x) 4.0 | 246.0 |
| VXC S504 | 12500 | 9260 | 6690 | 5385 | 2397 | 4483 | 36.6 | (1x) 37.0 | 38.5 | (1x) 4.0 | 294.0 |
| VXC S576 | 15120 | 10880 | 3840 | 7226 | 2397 | 4248 | 45.6 | (2x) 18.5 | 50.4 | (2x) 2.2 | 328.0 |
| VXC S600 | 15220 | 10980 | 3840 | 7226 | 2397 | 4248 | 48.4 | (2x) 22.0 | 50.4 | (2x) 2.2 | 328.0 |
| VXC S656 | 15400 | 11100 | 3840 | 7226 | 2397 | 4248 | 53.4 | (2x) 30.0 | 50.4 | (2x) 2.2 | 328.0 |
| VXC S700 | 16655 | 12355 | 4470 | 7226 | 2397 | 4483 | 52.4 | (2x) 30.0 | 50.4 | (2x) 2.2 | 392.0 |
| VXC S806 | 20555 | 14415 | 5120 | 10903 | 2397 | 4013 | 73.2 | (2x) 30.0 | 77.0 | (2x) 4.0 | 396.0 |
| VXC S858 | 20755 | 14615 | 5120 | 10903 | 2397 | 4013 | 77.8 | (2x) 37.0 | 77.0 | (2x) 4.0 | 396.0 |
| VXC S910 | 22570 | 16420 | 5710 | 10903 | 2397 | 4248 | 69.8 | (2x) 30.0 | 77.0 | (2x) 4.0 | 492.0 |
| VXC S964 | 22770 | 16550 | 5710 | 10903 | 2397 | 4248 | 75.0 | (2x) 37.0 | 77.0 | (2x) 4.0 | 492.0 |
| VXC S1010 | 25035 | 18505 | 6690 | 10903 | 2397 | 4483 | 73.2 | (2x) 37.0 | 77.0 | (2x) 4.0 | 588.0 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end. Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

Sound attenuation XA

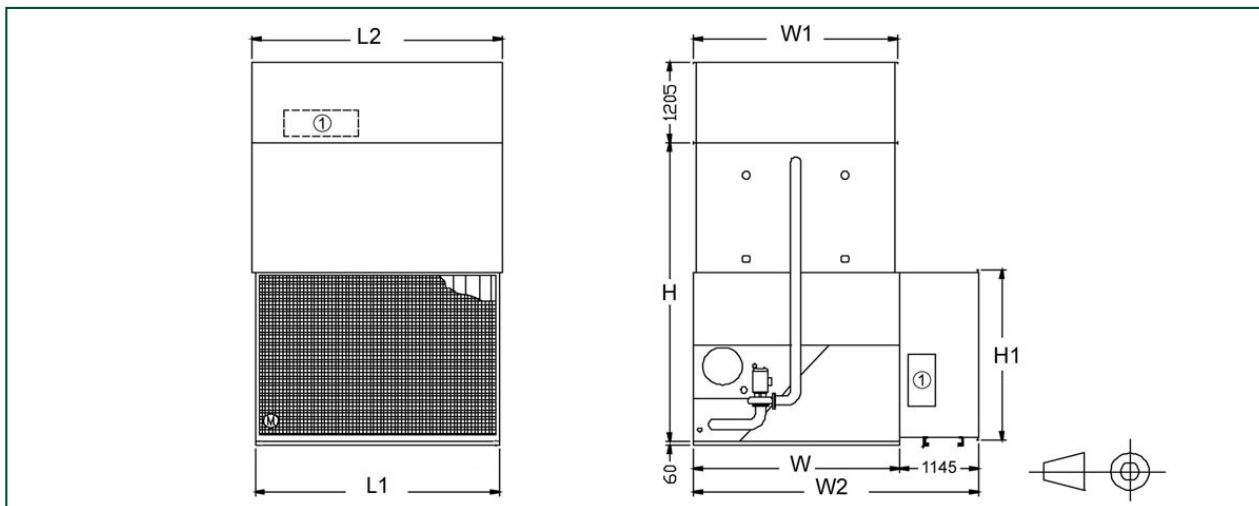

1. Access door; L = Unit Length; W = Unit Width; H = Unit Height (see Engineering Data).



| Model | Unit + Atten # pieces shipped | # Access Doors | | Dimensions (mm) | | | | | Weights (kg) | | | |
|------------|--|----------------|--------|-----------------|------|------|-------|-------|--------------|--------------|-----------|-------|
| | | Discharge | Intake | W2 | H1 | W1 | L1 | L2 | Intake | Solid Bottom | Discharge | Total |
| 14-28 | 4 ¹ | 1 | 2 | 2352 | 1090 | 1030 | 890 | 902 | 110 | 30 | 130 | 270 |
| 36-65 | 4 ¹ | 1 | 2 | 2352 | 1090 | 1030 | 1800 | 1816 | 175 | 50 | 185 | 400 |
| 72-97 | 4 | 1 | 2 | 2352 | 1090 | 1030 | 2710 | 2731 | 230 | 70 | 280 | 580 |
| 110-135 | 4 | 1 | 2 | 2352 | 1090 | 1030 | 3635 | 3645 | 300 | 100 | 360 | 760 |
| 150-205 | 4 | 1 | 2 | 2583 | 1600 | 1420 | 3635 | 3645 | 380 | 120 | 440 | 940 |
| 221-265 | 4 | 1 | 2 | 3542 | 2070 | 1955 | 3525 | 3645 | 500 | 190 | 530 | 1120 |
| S288-S350 | 4 | 1 | 2 | 3542 | 2070 | 2365 | 3550 | 3645 | 500 | 190 | 660 | 1350 |
| S403-S504 | 4 | 2 | 2 | 3542 | 2070 | 2365 | 5385 | 5480 | 660 | 300 | 830 | 1970 |
| S576-S700 | 7 | 2 | 2 | 3542 | 2070 | 2365 | 7200 | 7322 | 1000 | 380 | 1320 | 2700 |
| S806-S1010 | 7 | 4 | 2 | 3542 | 2070 | 2365 | 10885 | 10998 | 1320 | 600 | 1660 | 3580 |
| 357-454 | 4 | 1 | 2 | 4145 | 2560 | 2965 | 3525 | 3645 | 560 | 230 | 710 | 1500 |
| 562-680 | 4 | 2 | 2 | 4145 | 2560 | 2965 | 5365 | 5480 | 730 | 350 | 900 | 1980 |
| 714-908 | 7 | 2 | 2 | 4145 | 2560 | 2965 | 7050 | 7322 | 1120 | 460 | 1420 | 3000 |
| 1124-1360 | 7 | 4 | 2 | 4145 | 2560 | 2965 | 10730 | 10994 | 1460 | 700 | 1800 | 3960 |
| 495-516 | 4 | 1 | 2 | 2752 | 2560 | 3575 | 3525 | 3645 | 560 | 280 | 810 | 1650 |
| 715-804 | 4 | 2 | 2 | 4752 | 2560 | 3575 | 5365 | 5480 | 730 | 420 | 1020 | 2170 |
| 990-1032 | 7 | 2 | 2 | 4752 | 2560 | 3575 | 7050 | 7322 | 1120 | 560 | 1620 | 3300 |
| 1430-1608 | 7 | 4 | 2 | 4752 | 2560 | 3575 | 10730 | 10994 | 1460 | 840 | 2040 | 4340 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end . Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1.93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

Sound attenuation XB

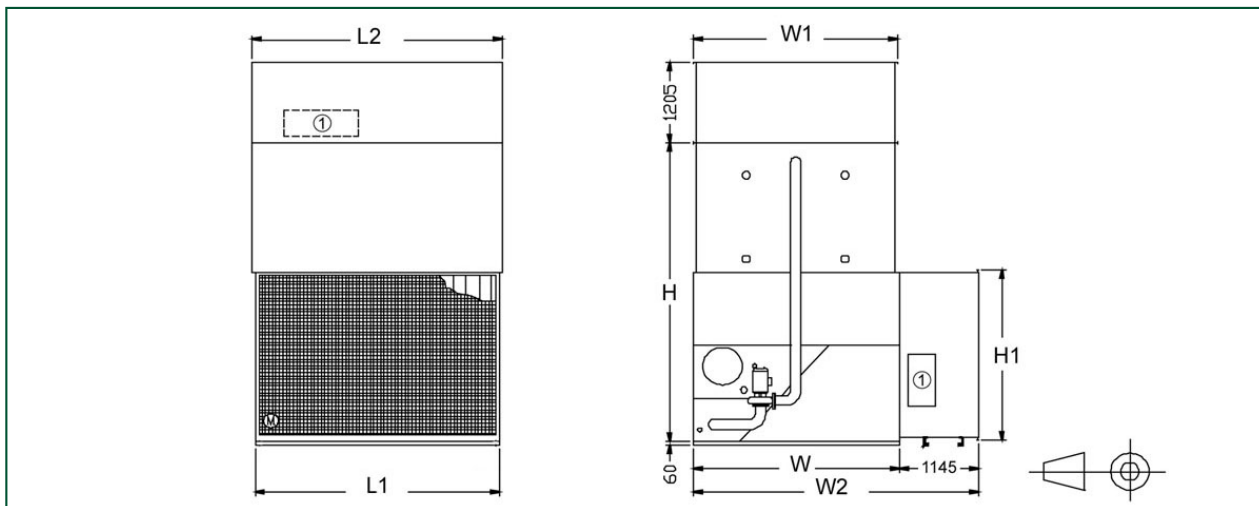

1. Access door; L = Unit Length; W = Unit Width; H = Unit Height (see Engineering Data).



| Model | Unit + Atten # pieces shipped | # Access Doors | | Dimensions (mm) | | | | | Weights (kg) | | | |
|------------|--|----------------|--------|-----------------|------|------|-------|-------|--------------|--------------|-----------|-------|
| | | Discharge | Intake | W2 | H1 | W1 | L1 | L2 | Intake | Solid Bottom | Discharge | Total |
| 14-28 | 4 ¹ | 1 | 2 | 2352 | 1090 | 1030 | 890 | 902 | 130 | 30 | 150 | 310 |
| 36-65 | 4 ¹ | 1 | 2 | 2352 | 1090 | 1030 | 1800 | 1816 | 220 | 50 | 220 | 490 |
| 72-97 | 4 | 1 | 2 | 2352 | 1090 | 1030 | 2710 | 2731 | 300 | 70 | 350 | 720 |
| 110-135 | 4 | 1 | 2 | 2352 | 1090 | 1030 | 3635 | 3645 | 370 | 100 | 420 | 890 |
| 150-205 | 4 | 1 | 2 | 2583 | 1600 | 1420 | 3635 | 3645 | 480 | 120 | 520 | 1120 |
| 221-265 | 4 | 1 | 2 | 3542 | 2070 | 1955 | 3525 | 3645 | 630 | 190 | 650 | 1220 |
| S288-S350 | 4 | 1 | 2 | 3542 | 2070 | 2365 | 3550 | 3645 | 630 | 190 | 800 | 1620 |
| S403-S504 | 4 | 2 | 2 | 3542 | 2070 | 2365 | 5385 | 5480 | 860 | 300 | 1090 | 2250 |
| S576-S700 | 7 | 2 | 2 | 3542 | 2070 | 2365 | 7200 | 7322 | 1260 | 380 | 1600 | 3240 |
| S806-S1010 | 7 | 4 | 2 | 3542 | 2070 | 2365 | 10885 | 10998 | 1720 | 600 | 2180 | 4500 |
| 357-454 | 4 | 1 | 2 | 4145 | 2560 | 2965 | 3525 | 3645 | 710 | 230 | 880 | 1820 |
| 562-680 | 4 | 2 | 2 | 4145 | 2560 | 2965 | 5365 | 5480 | 980 | 350 | 1210 | 2540 |
| 714-908 | 7 | 2 | 2 | 4145 | 2560 | 2965 | 7050 | 7322 | 1420 | 460 | 1760 | 3640 |
| 1124-1360 | 7 | 4 | 2 | 4145 | 2560 | 2965 | 10730 | 10994 | 1960 | 700 | 2420 | 5080 |
| 495-516 | 4 | 1 | 2 | 2752 | 2650 | 3575 | 3525 | 3645 | 710 | 280 | 1030 | 2020 |
| 715-804 | 4 | 2 | 2 | 4752 | 2560 | 3575 | 5365 | 5480 | 980 | 420 | 1410 | 2810 |
| 990-1032 | 7 | 2 | 2 | 4752 | 2560 | 3575 | 7050 | 7322 | 1420 | 560 | 2060 | 4040 |
| 1430-1608 | 7 | 4 | 2 | 4752 | 2560 | 3575 | 10730 | 10994 | 1960 | 840 | 2820 | 5620 |



VXC

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant connection sizes are ND 100 BSP MPT inlet and outlet (for models VXC 14 through 28 refrigerant connection sizes are ND 80 BSP MPT), consult your local BAC representative for size and location. Other connection sizes are available on special order. Refrigerant connections are standard bevelled for welding.
2. Make up, overflow, suction, drain connection and access door can be provided on side opposite to that shown; consult your BAC Balticare representative.
3. Unit height is indicative, for precise value refer to certified print.
4. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted.
5. The drawing units with only one spray pump show the standard right hand arrangement has the air inlet side on the right when facing the connection end . Left hand can be furnished by special order.
6. Coil, overflow, make-up and spray water connections are always located on the same end of the unit. For double pump units an additional overflow connection will be installed on the other end of the unit.
7. On model VXC 14 through VXC 135 access doors are located at the opposite of the air inlet side, ensure sufficient space for entry when positioning these units.
8. For indoor applications of evaporative condensers, the room may be used as a plenum with ductwork attached to the discharge only. If inlet ductwork is required, an enclosed fan section must be specified; consult your BAC representative for details.
9. Fan kW is at 0 Pa ESP. To operate against external static pressure up to 125 Pa, increase each fan motor one size.
10. Refrigerant charge listed is R717 operating charge. To determine operating charge of R 22 refrigerant, multiply by: 1,93. For R134A, multiply by : 1.98.
11. For dry operation, standard motors must be increased one size to avoid motor overloading. Extended surface coils are available to vastly increase dry capacity without motor size increase. Consult your Bac Balticare Representative for selection and pricing.
12. Models VXC 357-454, VXC 562-380, VXC 495-516 and VXC 725-804 have only 1 coil casing section and one or two fan motors. Fan cycling results in only on-off operation. On these units all fans need to operate simultaneously.
13. Models VXC 714-907, VXC 1124-1360, VXC 990-1032 and VXC 1430-1608 have 2 coils casing sections and one or two fan motors per coil casing section. Fan cycling results in only-off operation. On these units all fans need to operate simultaneously per coil casing section.

Last update: 23/07/2019

Sound attenuation XC

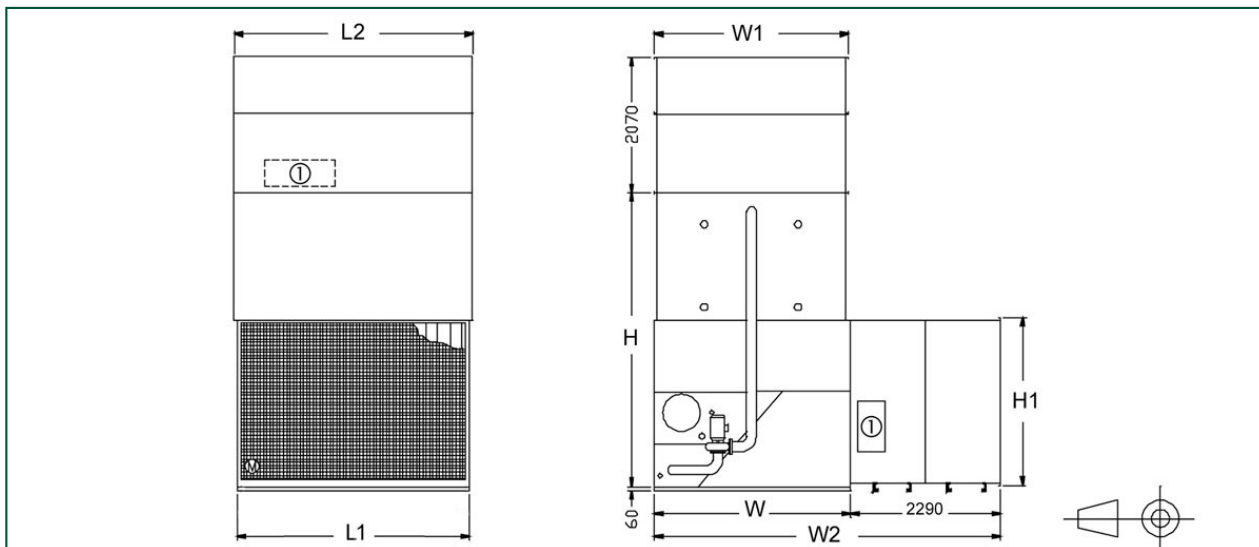

1. Access door; L = Unit Length; W = Unit Width; H = Unit Height (see Engineering data).



| Model | Unit + Atten # pieces shipped | # Access Doors | | Dimensions (mm) | | | | | Weights (kg) | | | |
|------------|--|----------------|--------|-----------------|------|------|-------|-------|--------------|--------------|-----------|-------|
| | | Discharge | Intake | W2 | H1 | W1 | L1 | L2 | Intake | Solid Bottom | Discharge | Total |
| 14-28 | 4 ¹ | 1 | 2 | N.A. | 1090 | 1030 | 890 | 902 | N.A. | 30 | N.A. | N.A. |
| 36-65 | 4 ¹ | 1 | 2 | N.A. | 1090 | 1030 | 1800 | 1816 | N.A. | 50 | N.A. | N.A. |
| 72-97 | 4 | 1 | 2 | N.A. | 1090 | 1030 | 2710 | 2731 | N.A. | 70 | N.A. | N.A. |
| 110-135 | 4 | 1 | 2 | N.A. | 1090 | 1030 | 3635 | 3645 | 830 | 100 | N.A. | N.A. |
| 150-205 | 4 | 1 | 2 | 3728 | 1600 | 1420 | 3635 | 3645 | 1080 | 120 | 1070 | 2270 |
| 221-265 | 4 | 1 | 2 | 4687 | 2070 | 1955 | 3525 | 3645 | 1420 | 190 | 1330 | 2940 |
| S288-S350 | 4 | 1 | 2 | 4687 | 2070 | 2365 | 3550 | 3645 | 1420 | 190 | 1640 | 3250 |
| S403-S504 | 4 | 2 | 2 | 4687 | 2070 | 2365 | 5385 | 5480 | 1970 | 300 | 2240 | 4510 |
| S576-S700 | 7 | 2 | 2 | 4687 | 2070 | 2365 | 7200 | 7322 | 2840 | 380 | 3280 | 6500 |
| S806-S1010 | 7 | 4 | 2 | 4687 | 2070 | 2365 | 10885 | 10998 | 3940 | 600 | 4480 | 9020 |
| 357-454 | 4 | 1 | 2 | 5290 | 2560 | 2965 | 3525 | 3645 | 1620 | 230 | 1820 | 3670 |
| 562-680 | 4 | 2 | 2 | 5290 | 2560 | 2965 | 5365 | 5480 | 2240 | 350 | 2490 | 5080 |
| 714-908 | 7 | 2 | 2 | 5290 | 2560 | 2965 | 7050 | 7322 | 3240 | 460 | 3640 | 7340 |
| 1124-1360 | 7 | 4 | 2 | 5290 | 2560 | 2965 | 10730 | 10994 | 4480 | 700 | 4980 | 10160 |
| 495-516 | 4 | 1 | 2 | 5897 | 2560 | 3575 | 3525 | 3645 | 1620 | 280 | 2130 | 4030 |
| 715-804 | 4 | 2 | 2 | 5897 | 2560 | 3575 | 5365 | 5480 | 2240 | 420 | 2920 | 5580 |
| 990-1032 | 7 | 2 | 2 | 5897 | 2560 | 3575 | 7050 | 7322 | 3240 | 560 | 4260 | 8060 |
| 1430-1608 | 7 | 4 | 2 | 5897 | 2560 | 3575 | 10730 | 10994 | 4480 | 840 | 5840 | 11160 |